

## Specifications LZ-030-HT-XXX




Performance Parameters	Symbol	Units	LZ-030-HT-120				LZ-030-HT-240				LZ-030-HT-360				LZ-030-HT-480			
Continuous Force <sup>1,5,6,7</sup>	$F_{cTmax}$	N (lbf)	88 (20)				175 (39)				263 (59)				351 (79)			
Peak Force <sup>2</sup>	$F_p$	N (lbf)	439 (99)				877 (197)				1247 (280)				1755 (395)			
Motor Constant <sup>1</sup>	$K_M$	$\frac{N}{\sqrt{W}}$ ( $\frac{lbf}{\sqrt{W}}$ )	9.6 (2.2)				13.5 (3.0)				16.6 (3.7)				19.1 (4.3)			
Thermal Resistance	$R_{th}$	°C/W	1.31				0.65				0.44				0.33			
Max Power Dissipation	$P_{cTmax}$	W	84				168				252				336			
Maximum Applied Bus Voltage <sup>8</sup>	$V_{DC}$	Volts	325				325				325				325			
Electrical Cycle Length	$E_c$	mm	60				60				60				60			
Electrical Time Constant	$\tau_e$	msec	1.9				1.9				1.9				1.9			
Maximum Coil Temperature	$T_{max}$	°C	130				130				130				130			
Winding Type			D	E	F	G	D	E	F	G	D	E	F	G	D	E	F	G
Force Constant <sup>1</sup>	$K_F$	$\frac{N}{A_{pk}}$ ( $\frac{lbf}{A_{pk}}$ )	26.5 (6.0)	N/A	15.3 (3.4)	N/A	26.5 (6.0)	53.0 (11.9)	15.3 (3.4)	30.6 (6.9)	26.5 (6.0)	79.5 (17.9)	N/A	45.9 (10.3)	26.5 (6.0)	53.0 (11.9)	N/A	30.6 (6.9)
Back EMF Constant p-p <sup>3,4</sup>	$K_e$	$\frac{V_p}{m/s}$ ( $\frac{V_p}{in/s}$ )	31.3 (0.8)	N/A	18.1 (0.5)	N/A	31.3 (0.8)	62.6 (1.6)	18.1 (0.5)	36.2 (0.9)	31.3 (0.8)	93.9 (2.4)	N/A	54.2 (1.4)	31.3 (0.8)	62.6 (1.6)	N/A	36.2 (0.9)
Peak Current <sup>2,4</sup>	$I_p$	$A_{pk}$ ( $A_{rms}$ )	16.5 (11.7)	N/A	28.7 (20.3)	N/A	33.1 (23.4)	16.5 (11.7)	57.3 (40.5)	28.7 (20.3)	47.0 (33.2)	15.7 (11.1)	N/A	27.1 (19.2)	66.2 (46.8)	33.1 (23.4)	N/A	57.3 (40.5)
Continuous Current <sup>1,4,5,6</sup>	$I_{cTmax}$	$A_{pk}$ ( $A_{rms}$ )	3.3 (2.3)	N/A	5.7 (4.1)	N/A	6.6 (4.7)	3.3 (2.3)	11.5 (8.1)	5.7 (4.1)	9.9 (7.0)	3.3 (2.3)	N/A	5.7 (4.1)	13.2 (9.4)	6.6 (4.7)	N/A	11.5 (8.1)
Resistance p-p <sup>3</sup> @20°C	$R_{20}$	ohm	7.15	N/A	2.38	N/A	3.57	14.29	1.19	4.76	2.38	21.44	N/A	7.15	1.79	7.15	N/A	2.38
Inductance p-p <sup>3</sup>	$L$	mH	13.40	N/A	4.47	N/A	6.70	26.80	2.23	8.93	4.47	40.20	N/A	13.40	3.35	13.40	N/A	4.47
<b>Mechanical Parameters</b>																		
Magnetic Attraction	$F_a$	N (lbf)	0 (0)				0 (0)				0 (0)				0 (0)			
Coil Mass	$M_c$	kg (lbf <sub>m</sub> )	0.74 (1.64)				1.37 (3.02)				2.00 (4.41)				2.63 (5.79)			
Magnetic Channel Mass	$M_n$	kg/m (lbf/in)	15.85 (0.89)				15.85 (0.89)				15.85 (0.89)				15.85 (0.89)			

**Notes:** Motor performance specifications are with sinusoidal commutation.

- Continuous forces, motor constant and currents listed are with coils at maximum temperature 130°C, mounted to a heat sink that is equivalent to an aluminum slide 25.4mm (1.0") thick with the following areas: 120 coil 774cm<sup>2</sup> (120in<sup>2</sup>), 240 coil 1160cm<sup>2</sup> (180in<sup>2</sup>), 360 coil 1680cm<sup>2</sup> (260 in<sup>2</sup>), 480 coil 2060cm<sup>2</sup> (320 in<sup>2</sup>).
- Calculated at 4% duty cycle with a maximum on time of 1 second.
- All winding parameters listed are measured line-to-line (phase-to-phase).
- All currents and voltages are measured 0-peak of the sine wave unless noted rms.
- Continuous force and current based on coil moving with all phases sharing the same load in sinusoidal commutation.
- For stand still conditions multiply continuous force and continuous current by 0.9.
- Coil mountings on either of the two narrow sides reduces continuous force by 10%.
- Maximum cable length 10 meters. Please consult factory concerning applications requiring longer cables  
All specifications are ±10%. Phase-to-phase inductance is ±30%.

### Motor Phasing Diagram

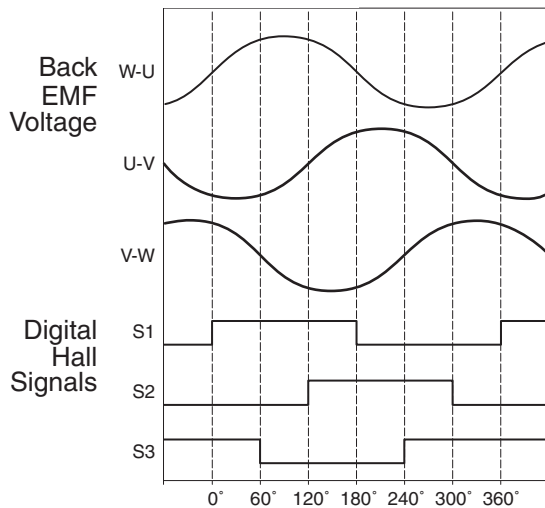

Note: Phasing direction is coil moving towards motor power cable

### Dimensions mm [in]

Size	Winding Code	Power Cable Dia.	Gauge
030-120	D F	φ6.1 (.24)	0.75mm <sup>2</sup> (18)
030-240	D E F G	φ6.1 (.24)	0.75mm <sup>2</sup> (18)
030-360	D E G	φ6.1 (.24)	0.75mm <sup>2</sup> (18)
030-480	D E G	φ6.1 (.24)	0.75mm <sup>2</sup> (18)