




Specifications LZ-075-T-XXX

Performance Parameters	Symbol	Units	LZ-075-T-120				LZ-075-T-240				LZ-075-T-360				LZ-075-T-480			
Continuous Force ^{1,5,6,7}	F_{cTmax}	N (lbf)	165 (37)				329 (74)				494 (111)				659 (148)			
Peak Force ²	F_p	N (lbf)	824 (185)				1647 (370)				2471 (556)				3295 (741)			
Motor Constant ¹	K_M	$\frac{N\sqrt{-W}}{(lb_f\sqrt{-W})}$	16.6 (3.7)				23.5 (5.3)				28.8 (6.5)				33.2 (7.5)			
Thermal Resistance	R_{th}	°C/W	1.12				0.56				0.37				0.28			
Max Power Dissipation	P_{cTmax}	W	98				197				295				393			
Maximum Applied Bus Voltage ⁸	V_{DC}	Volts	325				325				325				325			
Electrical Cycle Length	E_c	mm	60				60				60				60			
Electrical Time Constant	τ_e	msec	1.9				1.9				1.9				1.9			
Maximum Coil Temperature	T_{max}	°C	130				130				130				130			
Winding Type			D	E	F	G	D	E	F	G	D	E	F	G	D	E	F	G
Force Constant ¹	K_F	$\frac{N/A_{pk}}{(lb_f/A_{pk})}$	60.3 (13.5)	N/A	34.8 (7.8)	N/A	60.3 (13.5)	120.5 (27.1)	34.8 (7.8)	69.6 (15.6)	60.3 (13.5)	180.8 (40.6)	34.8 (7.8)	104.4 (23.5)	60.3 (13.5)	120.5 (27.1)	N/A	69.6 (15.6)
Back EMF Constant p-p ^{3,4}	K_e	$\frac{V_p/m/s}{(V_p/in/s)}$	71.2 (1.8)	N/A	41.1 (1.0)	N/A	71.2 (1.8)	142.3 (3.6)	41.1 (1.0)	82.2 (2.1)	71.2 (1.8)	213.5 (5.4)	41.1 (1.0)	123.3 (3.1)	71.2 (1.8)	142.3 (3.6)	N/A	82.2 (2.1)
Peak Current ^{2,4}	I_p	$\frac{A_{pk}}{(A_{rms})}$	13.7 (9.7)	N/A	23.7 (16.7)	N/A	27.3 (19.3)	13.7 (9.7)	47.3 (33.5)	23.7 (16.7)	41.0 (29.0)	13.7 (9.7)	71.0 (50.2)	23.7 (16.7)	54.7 (38.7)	27.3 (19.3)	N/A	47.3 (33.5)
Continuous Current ^{1,4,5,6}	I_{cTmax}	$\frac{A_{pk}}{(A_{rms})}$	2.7 (1.9)	N/A	4.7 (3.3)	N/A	5.5 (3.9)	2.7 (1.9)	9.5 (6.7)	4.7 (3.3)	8.2 (5.8)	2.7 (1.9)	14.2 (10.0)	4.7 (3.3)	10.9 (7.7)	5.5 (3.9)	N/A	9.5 (6.7)
Resistance p-p ³ @20°C	R_{20}	ohm	12.25	N/A	4.08	N/A	6.12	24.50	2.04	8.17	4.08	36.75	1.36	12.25	3.06	12.25	N/A	4.08
Inductance p-p ³	L	mH	22.97	N/A	7.66	N/A	11.48	45.94	3.83	15.31	7.66	68.91	2.55	22.97	5.74	22.97	N/A	7.66
Mechanical Parameters																		
Magnetic Attraction	F_a	N (lbf)	0 (0)				0 (0)				0 (0)				0 (0)			
Coil Mass	M_c	kg (lb _m)	1.13 (2.49)				2.14 (4.72)				3.15 (6.95)				4.16 (9.18)			
Magnetic Channel Mass	M_n	kg/m (lb/in)	24.51 (1.37)				24.51 (1.37)				24.51 (1.37)				24.51 (1.37)			

Notes: Motor performance specifications are with sinusoidal commutation.

- Continuous forces, motor constant and currents listed are with coils at maximum temperature 130°C, mounted to a heat sink that is equivalent to an aluminum slide 25.4mm (1.0") thick with the following areas: 120 coil 774cm² (120in²), 240 coil 1160cm² (180in²), 360 coil 1680cm² (260 in²), 480 coil 2060cm² (320 in²).
- Calculated at 4% duty cycle with a maximum on time of 1 second.
- All winding parameters listed are measured line-to-line (phase-to-phase).
- All currents and voltages are measured 0-peak of the sine wave unless noted rms.
- Continuous force and current based on coil moving with all phases sharing the same load in sinusoidal commutation.
- For stand still conditions multiply continuous force and continuous current by 0.9.
- Coil mountings on either of the two narrow sides reduces continuous force by 10%.
- Maximum cable length 10 meters. Please consult factory concerning applications requiring longer cables
All specifications are ±10%. Phase-to-phase inductance is ±30%.

Motor Phasing Diagram

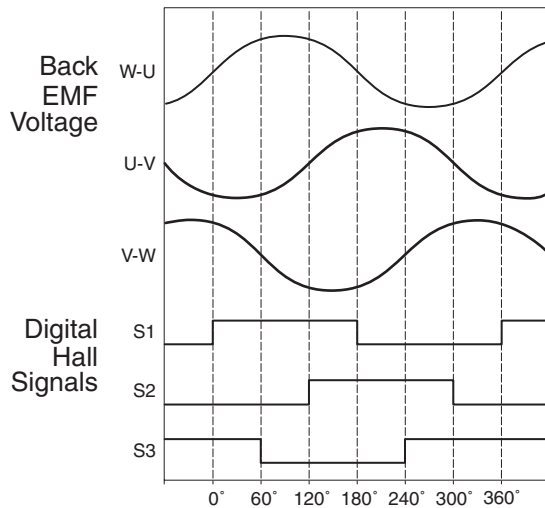


Note: Phasing direction is coil moving towards motor power cable

Dimensions mm [in]

Size	Winding Code	Power Cable Dia.	Gauge
075-120	D F	φ6.1 (.24)	0.75mm ² (18)
075-240	D E F G	φ6.1 (.24)	0.75mm ² (18)
075-360	D E F G	φ6.1 (.24)	0.75mm ² (18)
075-480	D E G	φ6.1 (.24)	0.75mm ² (18)

Coil Assembly LZ-075-T-XXX


Dimensions mm [in]

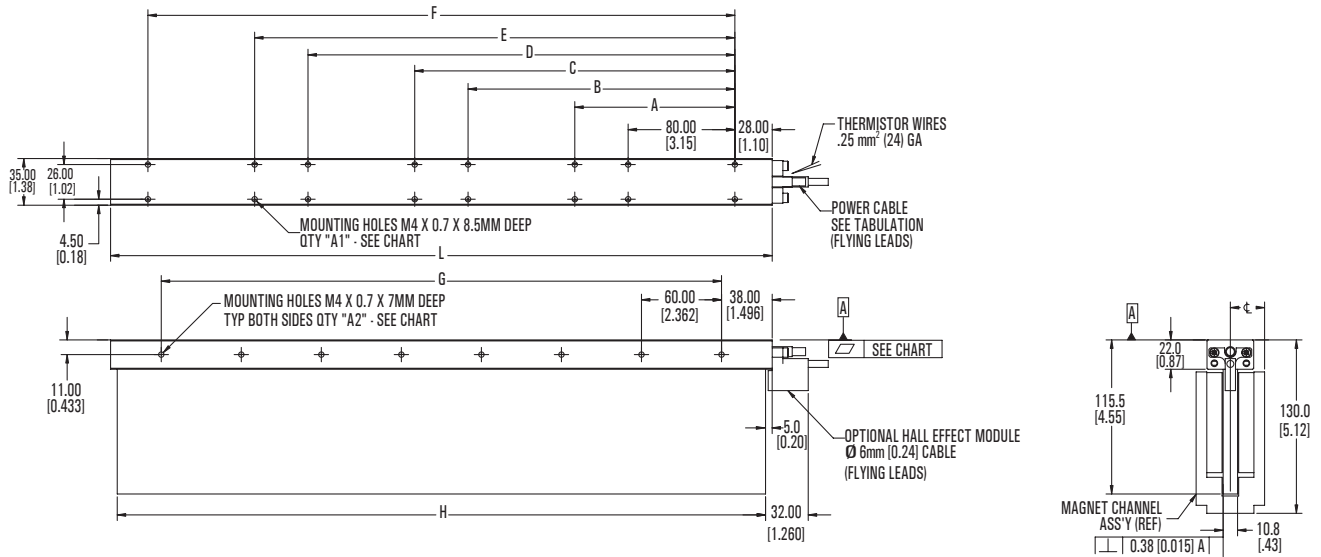

Coil												
Size	L	A	B	C	D	E	F	G	H	A1 QTY	A2 QTY	Flatness A
075-120	136.00 (5.35)	---	---	---	---	---	---	60.00 (2.362)	126.0 (4.96)	4	3	0.25 (.010)
075-240	256.00 (10.08)	120.00 (4.724)	200.00 (7.874)	---	---	---	---	180.00 (7.087)	246.0 (9.69)	8	5	0.25 (.010)
075-360	376.00 (14.80)	120.00 (4.724)	200.00 (7.874)	240.00 (9.449)	320.00 (12.598)	---	---	300.00 (11.811)	366.0 (14.41)	12	7	0.38 (.015)
075-480	496.00 (19.53)	120.00 (4.724)	200.00 (7.874)	240.00 (9.449)	320.00 (12.598)	360.00 (14.173)	440.00 (17.323)	420.00 (16.535)	486.0 (19.13)	16	9	0.64 (.025)

Magnet Channel					
Size	L	X	Hole Qty	—	▨
-120	119.0 (4.69)	1	2	0.13 (.005)	0.13 (.005)
-180	179.0 (7.05)	2	3	0.13 (.005)	0.13 (.005)
-240	239.0 (9.41)	3	4	0.13 (.005)	0.13 (.005)
-480	479.0 (18.86)	7	8	0.26 (.010)	0.26 (.010)
-600	599.0 (23.58)	9	10	0.26 (.010)	0.26 (.010)

Magnet Channel LZM-075-T-XXX

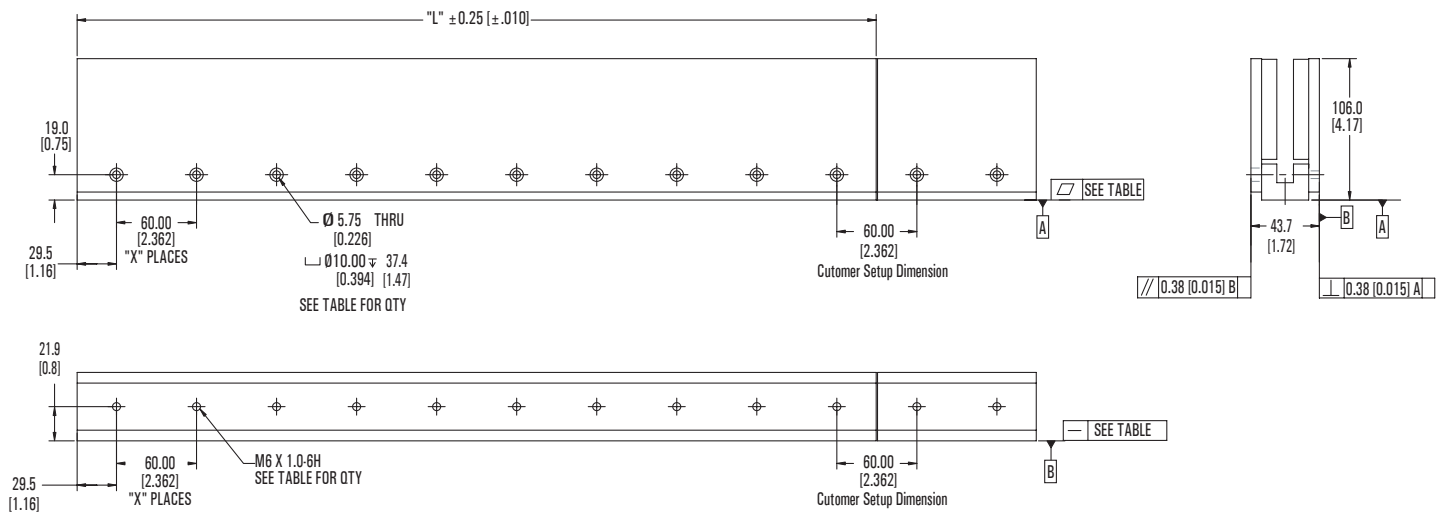

Tolerances
 .x ± .25 [.xx] ± .01
 Metric English
 .xx ± .13 [.xxx] ± .005